(54) Title: SINUSOID SELECTION IN AUDIO ENCODING

(57) Abstract: A method of encoding (1) an audio signal (x(t)) by representing (12) at least part of the audio signal by a plurality of sinusoids, the method comprising the steps of performing an analysis on a first segment of said audio signal, selecting candidate sinusoids based on said analysis, determining for at least one of the candidate sinusoids a phase consistency defined by an extent to which a phase of said candidate sinusoid at a certain moment in time can be predicted from a phase of said candidate sinusoid determined at another moment in time, and selecting said candidate sinusoid as a selected sinusoid when its phase consistency is above a predetermined threshold. The selection of sinusoids according to the invention will result in a smaller number of sinusoids to be encoded for a given audio quality, which is advantageous in terms of bit-rate for a given audio quality.

CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE,
EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN,
IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV,
MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM,
PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ,
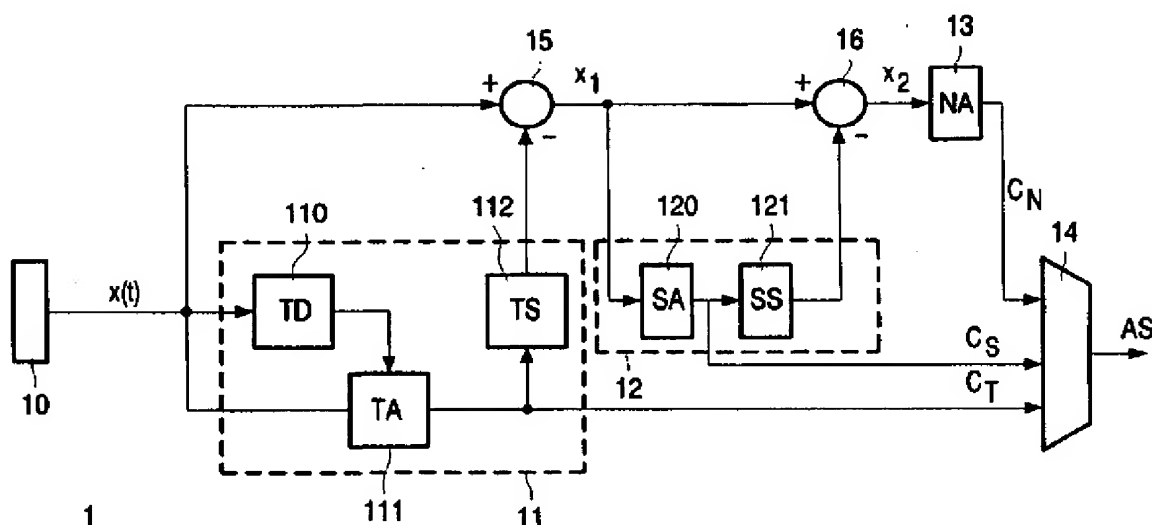TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM,
ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD,
SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY,
KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG,
CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT,
LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ,
CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD,
TG)

Published:
— *with international search report*

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

Sinusoid selection in audio encoding

The invention relates to coding of an audio signal, in which sinusoids relevant for reproducing the audio signal are selected and of which parameters are encoded.

5   In a sinusoidal audio encoder, at least part of an audio signal is represented by a plurality of sinusoids, which sinusoids are usually described by their frequencies, their amplitudes and optionally their phases. In the encoding process, an audio signal is segmented in time segments, which segments are analyzed for their frequency contents. Typically, the segment size that is used in an audio encoder is within a range of 5 and 60 ms. For each
10   segment a number of sinusoids are selected of which the parameters are subsequently coded. In order to minimize the bit rate for a given audio quality, only relevant sinusoids need to be selected and encoded, i.e. only those sinusoids needed to reproduce the encoded audio signal in an acceptable perceptual quality.
           R. McAulay and T. Quartieri, "Speech analysis/synthesis based on sinusoidal
15   representation.", *IEEE Transactions on Acoustics, Speech and Signal Processing*, 1986, 43:744-754, disclose a method to select sinusoids called peak-picking. The peak-picking method comprises a selection of those frequencies that have a peak in the amplitude spectrum. Another method for selecting sinusoids is an iterative process called matching pursuit as disclosed by the article from R. Heusdens and S. van de Par, "Rate-distortion
20   optimal sinusoidal modeling of audio and speech using psychoacoustical matching pursuits", *Proc. IEEE Int. Conf. Acoust. Speech and signal Proc., Orlando (USA)*, 2002. Every iteration, the frequency having the highest peak in the amplitude spectrum is selected and is subsequently subtracted from the signal. The residual signal is used in the next iteration. The process is typically stopped when a fixed number of sinusoids are selected.
25   A problem arising from the peak-picking method is that it is not known beforehand how many sinusoids are estimated since all peaks are selected. Especially when the amplitude spectrum is noisy, too many sinusoids are selected. In contrast to peak-picking, the number of selected sinusoids in matching pursuit is fixed. As a consequence, in order to guarantee that all relevant sinusoids will be selected, this fixed number should be set high.

Again, too many sinusoids will be selected. The selection of too many sinusoids results in a high bit rate, since all of these sinusoids have to be encoded. Another disadvantage is the extra expenses in processing time. Perceptual modeling for example is a process used in many audio encoders in order to encode only that part of an audio signal that can be heard by

5   a human ear. This modeling can be an expensive process and as a result, a large number of sinusoids that have to be analyzed is undesired.

        An object of the invention is to provide audio encoding that is advantageous in

10   terms of bit-rate for a given audio quality. To this end, the invention provides a method of encoding, an audio encoder and an audio system as defined in the independent claims. Advantageous embodiments are defined in the dependent claims.

        A first aspect of the invention provides a sinusoidal encoding method which comprises the steps of performing an analysis on a first segment of the audio signal, selecting

15   candidate sinusoids based on said analysis, determining for at least one of the candidate sinusoids a phase consistency defined by an extent to which a phase of said candidate sinusoid at a certain moment in time can be predicted from a phase of said candidate sinusoid determined at another moment in time, and selecting said candidate sinusoid as a selected sinusoid when its phase consistency is above a predetermined threshold. Said analysis for

20   selecting candidate sinusoids will usually be a frequency analysis. Such a frequency analysis is for example used in conventional sinusoid selection techniques such as peak-picking or matching pursuit. The phase of said candidate sinusoid at a certain moment in time can be predicted from the phase of said candidate sinusoid determined at another moment in time, as its frequency and the time difference between the time of prediction and the time of

25   determination are known. The invention is based on the insight that when sinusoids are synthesized in a decoder in order to reproduce an encoded audio signal, the sinusoid's phases will be consistent. By selecting those sinusoids for encoding of which the phases are consistent, a better selection is made. Only selected sinusoids are encoded. As a result, the selection procedure based on phase consistency will result in a smaller number of sinusoids

30   to be encoded for a given audio quality, which is advantageous in terms of bit-rate for a given audio quality.

        In an embodiment of the invention, said candidate sinusoid's phase consistency is determined by segmenting a second segment of said audio signal into at least a first and a second part, determining the actual phases of said candidate sinusoid in at least the

first and the second part, using the actual phase in the first part to serve as the input for predicting the actual phase in the second part, and determining said candidate sinusoid's phase consistency based on a prediction error between the actual phase and the predicted phase in the second part. Usually, the second segment will be equal to the first segment used

5   in the selection of candidate sinusoids, but this is not necessarily the case. An advantage of this embodiment is that a candidate sinusoid's actual phase can be easily determined by performing a frequency analysis like an FFT procedure, for which analysis a part of the audio signal is needed as an input.

In a further embodiment of the invention, a further selection procedure is

10   applied on the selected sinusoids. This further selection procedure comprises the steps of defining for at least one of the selected sinusoids a local frequency band around said selected sinusoid's frequency, combining amplitudes of frequency components within said local frequency band from which at least one of the selected sinusoids within said local frequency band is excluded and further selecting said selected sinusoid as a further selected sinusoid in

15   dependence on the combination of amplitudes. For the further selection procedure applied on the selected sinusoids, an analysis is performed on a third segment of the audio signal. Usually, the third segment will be equal to the second segment used in the selection of selected sinusoids, but this is not necessarily the case. By combining amplitudes of frequency components within said local frequency band from which at least one of the selected

20   sinusoids within said local frequency band is excluded, a measure is obtained for background frequency components within said selected sinusoid's local frequency band. By using this measure, a better selection is made. Also, the further selection is based on a sinusoid's amplitude, which is independent of its phase. Consequently, the further selection can lead to a further reduction of the number of further selected sinusoids in comparison to the number

25   of selected sinusoids selected by the previous selection procedure. Only further selected sinusoids will have to be encoded. As a result, the further selection procedure will result in a smaller number of sinusoids to be encoded for a given audio quality, which is advantageous in terms of bit-rate for a given audio quality. Because of the independence between the selection procedure based on phase consistency and the further selection procedure based on

30   amplitudes, it is also possible to perform both selection procedures in parallel. Both selection procedures then make a selection out of the candidate sinusoids, after which the results can be combined.

In a still further embodiment of the invention, a bandwidth of said local frequency band around said selected sinusoid's frequency is defined in dependence on said

selected sinusoid's frequency. Because of said dependence on said selected sinusoid's frequency, the further selection procedure can be tuned suitably for different frequencies.

In an even further embodiment of the invention, said dependence on said selected sinusoid's frequency is based on a human's perception of audio. An example of such a dependence is

5   defined by a Bark bandwidth. A Bark is a unit of perceptual frequency, which is known in the art. Other examples are the Mel scale and the ERB scale, which are also known in the art. By taking the human's perception of audio into account, a better decision is made to further select a selected sinusoid as a further selected sinusoid.

According to a further aspect of the invention, said selected sinusoid is further

10   selected as a further selected sinusoid when its amplitude is significant with regard to said combination of amplitudes, which significance is evaluated by thresholding a difference between said selected sinusoid's amplitude and a weighted mean amplitude of frequency components within said selected sinusoid's local frequency band from which at least one of the selected sinusoids within said local frequency band is excluded. By thresholding said

15   difference, a suitable method is obtained for determining the peakiness of a selected sinusoid.

According to a still further aspect of the invention, said significance of said selected sinusoid's amplitude is evaluated by thresholding a ratio of a difference between said selected sinusoid's amplitude and a weighted mean amplitude of frequency components within said selected sinusoid's local frequency band from which at least one of the selected

20   sinusoids within said local frequency band is excluded, and a weighted deviation of the amplitudes of frequency components within said local frequency band from which at least one of the selected sinusoids within said local frequency band is excluded. For said deviation, a definition of the standard deviation can be used for example. By thresholding said ratio, another suitable method is obtained for determining the peakiness of a selected sinusoid.

25   The aforementioned and other aspects of the invention will be apparent from and elucidated with reference to the embodiments described hereinafter.

In the drawings:

30   Fig. 1 shows an embodiment of an audio encoder according to the invention;

Fig. 2 shows an example of segmenting an audio segment in smaller parts for determining a candidate sinusoid's phase consistency;

Fig. 3 shows a block diagram representing a further selection procedure applied on selected sinusoids according to the invention;

Fig. 4 shows an embodiment of an audio system according to the invention. The drawings only show those elements that are necessary to understand the invention.

5   Fig. 1 shows an embodiment of an audio encoder 1 according to the invention, comprising an input unit 10 for obtaining an input audio signal $x(t)$. The audio encoder 1 separates the input signal into three components: transient signal components, sinusoidal signal components and noise signal components. The audio encoder 1 comprises a transient encoder 11, a sinusoidal encoder 12 and a noise analyzer 13.

10   The transient encoder 11 comprises a transient detector (TD) 110, a transient analyzer (TA) 111 and a transient synthesizer (TS) 112. First, the signal $x(t)$ enters the transient detector 110, the transient analyzer 111 and a subtractor 15. The transient detector 110 estimates if there is a transient signal component and at which position. This information is fed to the transient analyzer 111. This information may also be used in a sinusoidal

15   analyzer (SA) 120 or a noise analyzer (NA) 13 to obtain advantageous signal-induced segmentation. The transient analyzer 111 tries to extract (the main part of) the transient signal component. This is for example done by matching a shape function to a signal segment and determining the content underneath the shape function, e.g. a (small) number of sinusoids. This information is contained in a transient code C_T. The transient code C_T is furnished to the

20   transient synthesizer 112 and a multiplexer 14. The synthesized transient signal component is subtracted from the input signal $x(t)$ in subtractor 15, resulting in a signal x_1 which is furnished to the sinusoidal analyzer 120 and a further subtractor 16. The sinusoidal analyzer 120 determines the sinusoidal signal components. This information is contained in a sinusoidal code C_S which is furnished to a sinusoidal synthesizer (SS) 121 and the

25   multiplexer 14. From the sinusoidal code C_S, the sinusoidal signal components are reconstructed by the sinusoidal synthesizer 121. This signal is subtracted in subtractor 16 from the input signal x_1. The remaining signal x_2 is devoid of (large) transient signal components and (main) sinusoidal signal components and is therefore assumed to mainly consist of noise. Consequently, the signal x_2 is furnished to the noise analyzer 13 where it is

30   analyzed for its spectral and temporal envelope. This information is contained in a noise code C_N. In the multiplexer 14, an audio stream AS is constituted which includes the codes C_T, C_S and C_N. The audio stream AS is furnished to e.g. a data bus, an antenna system, a storage medium etc.

In the following, the selection of sinusoids in the sinusoidal analyzer 120 according to an embodiment of the invention will be discussed. It is also possible to use the sinusoid selection procedure in the transient analyzer 111, though this is rarely done in practice as only a small number of sinusoids are analyzed there.

5   Before the actual selection of sinusoids is performed, first a number of candidate sinusoids are selected. An analysis is performed on a first segment of the audio signal, from which analysis candidate sinusoids are selected. This selection can for example be performed by conventional techniques like peak-picking or matching pursuit which uses a frequency analysis on the first segment. The result will be a number of candidate sinusoids of

10   which the frequencies are stored in $F = (f_1, f_2, ..., f_L)$ with L the number of candidate sinusoids and the frequencies f_i defined in Herz (Hz). On at least one of the candidate sinusoids a more specific sinusoid selection procedure will be applied which is based on the phase consistency of the candidate sinusoid. The candidate sinusoid's phase consistency is defined by an extent to which a phase of said candidate sinusoid at a certain moment in time

15   can be predicted from a phase of said candidate sinusoid determined at another moment in time. Next, said candidate sinusoid is selected as a selected sinusoid when said phase consistency is above a predetermined threshold.

In an embodiment of the invention, the candidate sinusoid's phase consistency is determined by first segmenting a second segment of the audio signal into smaller parts.

20   This second segment will usually be equal to the first segment used in the selection of candidate sinusoids, but also a different second segment can be used. Two or more smaller parts have to be available for determining the candidate sinusoid's phase consistency. The smaller parts can possibly overlap each other, but this is not necessarily the case. A second segment x_s can for example be segmented into three overlapping smaller parts as shown in

25   Fig. 2. If N is the number of samples of the second segment x_s and N is an even number, the smaller parts are defined by:

$$x_{s_1}[k] = x_s[k]$$
$$x_{s_2}[k] = x_s[k + M/2] \qquad (1)$$
$$x_{s_3}[k] = x_s[k + M]$$

in which $M = N/2$ and $1 \leq k \leq M$. The smaller parts x_{s_1}, x_{s_2} and x_{s_3} each have a length M. On each of these three smaller parts, the actual phases of the candidate sinusoid having a

30   frequency f_i from F are determined. For this purpose the smaller parts can be windowed suitable for a frequency analysis, after which the frequency analysis can be performed like an

FFT procedure. An example of the positions for a phase determination is shown in Fig. 2 by
φ_1, φ_2 and φ_3. Next, the phases can be predicted, in this case from smaller part 1 to 2, from 2
to 3 and from 1 to 3. The differences between the actual and the predicted phases lead to the
following prediction errors for the candidate sinusoid:

$$E_{1,2} = (\varphi_1 - (\varphi_2 - T/2 \cdot 2\pi \cdot f_i))mod(2\pi)$$
$$E_{2,3} = (\varphi_3 - (\varphi_2 + T/2 \cdot 2\pi \cdot f_i))mod(2\pi) \qquad (2)$$
$$E_{1,3} = (\varphi_3 - (\varphi_1 + T \cdot 2\pi \cdot f_i))mod(2\pi)$$

in which the prediction errors are in modulo sense (mod(2π)), the phases φ_1, φ_2 and φ_3 are
given in radians, T is given in seconds and is defined by $T = M/F_s$ in which F_s is the sampling
frequency (e.g. 44.1 kHz). Using a certain criterion based on these prediction errors E, the
candidate sinusoid can be selected as a selected sinusoid. A possible criterion might be a test
if at least one of the following conditions is true:

$$|E_{1,2}| < c$$
$$|E_{2,3}| < c \qquad (3)$$
$$|E_{1,3}| < 2 \cdot c$$

in which c is typically dependent on the number of samples N of the second segment x_s and
the number of samples M of the smaller parts x_{s_1}, x_{s_2} and x_{s_3}. An example of a definition for c
is:

$$c = \frac{2 \cdot \pi}{3 \cdot N} \cdot \frac{M}{2} \qquad (4)$$

In a further embodiment of the invention, a further selection of the selected
sinusoids is performed. Fig. 3 shows a block diagram representing the further selection
process applied on selected sinusoids. The frequencies of these selected sinusoids are stored
in $F_q = (f_1, f_2, \ldots, f_R)$ with R the number of selected sinusoids and the frequencies f_i defined in
Herz (Hz). A third segment can be windowed suitable for a frequency analysis, which results
in a windowed segment x_w. The third segment will usually be equal to the second segment
used in the previous selection of sinusoids, but also a different third segment can be used.
First, a preprocessing stage (PP) is performed. In (I), for each frequency f_i from F_q, the
selected sinusoids are synthesized and subtracted from the windowed segment x_w. In (II), the
resulting segment x_{ws} is zero-padded to length P and analyzed for its frequency components
by for example an FFT procedure. The resulting amplitude spectrum is denoted by $|X_S|$.
Secondly, in (III), the segment x_w is zero-padded to length P and analyzed for its frequency
components without subtracting frequencies resulting in amplitude spectrum $|X|$. After the

preprocessing stage, a selection procedure is started for at least one of the selected sinusoids having a frequency f_i from F_q initialized by (IV). In (V) a local frequency band is determined around said frequency f_i. For defining the local frequency band, different definitions can be used. In this case it is chosen to use a Bark bandwidth, e.g. defined by the critical bandwidth:

$$b(f_i) = 25 + 75 \cdot (1 + 1.4 \cdot 10^{-6} \cdot f_i^2)^{0.69} \qquad (5)$$

From the critical bandwidth $b(f_i)$ defined in Herz (Hz) the boundary frequencies f_a and f_b are determined by:

$$f_a = \max\left(f_i - \frac{b(f_i)}{2}, 0 \right)$$
$$f_b = \min\left(f_i + \frac{b(f_i)}{2}, \frac{F_s}{2} \right) \qquad (6)$$

The spectrum is indexed with index i_{spect} running from 0 to $(P-1)$ in relation to the frequency f_{spect} according to:

$$\frac{i_{spect}}{P} \cdot F_s = f_{spect} \qquad (7)$$

Consequently, the indices i_a and i_b in the spectrum corresponding to the boundary frequencies f_a and f_b are determined by:

$$i_a = round\left(\frac{f_a \cdot P}{F_s} \right)$$
$$i_b = round\left(\frac{f_b \cdot P}{F_s} \right) \qquad (8)$$

In which $round(r)$ denotes to rounding of r to the closest integer. Now that the local frequency band is defined, a mean amplitude of the frequency band $\overline{m}_i$ of the selected sinusoid is computed in (VI) from $|X_s|$ by:

$$\overline{m}_i = \frac{\sum_{k=i_a}^{i_b} \left(A_s(k) \cdot W_i(k) \right)}{\sum_{k=i_a}^{i_b} \left(W_i(k) \right)} \qquad (9)$$

in which $A_S(k)$ is the amplitude of the frequency component in the amplitude spectrum $|X_s|$ at index k and $W_i(k)$ is a weighting factor dependent on index k. The weighting factor can be constant for all k. However, the weighting factor can for example also be decreasing for an index k closer to one of the boundary frequency indices i_a or i_b, in order to reduce boundary effects. The selected sinusoid will be further selected as a further selected sinusoid in dependence on the other amplitudes within its local frequency band. Therefore, a method for

further selecting the selected sinusoid as a further selected sinusoid is to use a criterion based on the weighted mean amplitude of the selected sinusoid's frequency band $\bar{m}_i$ as calculated in (9) and the amplitude of the selected sinusoid $A_i = A(i_{f_i})$ of which the index i_{f_i} in the amplitude spectrum can be determined by:

$$i_{f_i} = round\left(\frac{f_i \cdot P}{F_s}\right) \tag{10}$$

In an even further embodiment of the invention, the criterion used in the further selection procedure also comprises a standard deviation σ_i of the selected sinusoid's local frequency band, which is calculated in (VI) by:

$$\sigma_i = \sqrt{\frac{\sum_{k=i_a}^{i_b}\left((A_s(k) - \bar{m}_i)^2 \cdot W_2(k)\right)}{\sum_{k=i_a}^{i_b}(W_2(k))}} \tag{11}$$

In which $W_2(k)$ is a further weighting factor dependent on index k. The further weighting factor can be constant for all k. However, the further weighting factor can for example also be decreasing for an index k closer to one of the boundary frequency indices i_a or i_b, in order to reduce boundary effects. $W_2(k)$ can be chosen equal to $W_1(k)$ used in (9) but this is not necessarily the case. From the amplitude of the selected sinusoid A_i, the mean amplitude $\bar{m}_i$ and the standard deviation σ_i of the selected sinusoid's frequency band, a ratio r_i can be defined that is a measure for a peakiness of the selected sinusoid:

$$r_i = \frac{|A_i - \bar{m}_i|}{\sigma_i} \tag{12}$$

In the selection criterion (VIII) this ratio r_i is compared to a threshold T_i. The threshold T_i can for example be a fixed threshold or a threshold dependent on certain parameters like the frequency of the selected sinusoid f_i, the index i_{f_i} of the frequency in the frequency spectrum and/or the number of samples P used for the frequency analysis. An example of a definition for the threshold T_i is:

$$T_i = (2 \cdot i_{f_i})/(P/2) \cdot 5 + 1 \tag{13}$$

If the ratio r_i is above the threshold T_i, the selected sinusoid of frequency f_i is kept for encoding (S). Otherwise the selected sinusoid is rejected (NS).

Fig. 4 shows an embodiment of an audio system according to the invention comprising an audio encoder 1 as shown in Fig. 1. Such a system offers recording and/or

transmitting features. An audio signal $x(t)$ is obtained by an audio signal obtaining device 41 such as an audio player, a microphone or an audio input connector etc. The audio signal $x(t)$ serves as the input for an audio encoder 1 as shown in Fig. 1. The output audio stream AS is furnished from the audio encoder 1 to a formatting unit 42, which formats the audio stream

5   AS suitably for a communication channel 43 which may be a wireless connection, a data bus or a storage medium. In case the communication channel 43 is a storage medium, the storage medium may be fixed in the system or may also be a removable disc, a memory stick etc. The communication channel 43 may be part of the audio system, but will however often be outside the audio system.

10   It should be noted that the above-mentioned embodiments illustrate rather than limit the invention, and that those skilled in the art will be able to design many alternative embodiments without departing from the scope of the appended claims. In the claims, any reference signs between parenthesis shall not be construed as limiting the claim. The word 'compromising' does not exclude the presence of other elements or steps than those listed in

15   a claim. The invention can be implemented by means of hardware comprising several distinct elements, and by means of a suitably programmed computer. In a device claim enumerating several means, several of these means can be embodied by one and the same item of hardware. The mere fact that certain measures are recited in mutually different dependent claims does not indicate that a combination of these measures cannot be used to advantage.

20   In summary, the invention provides a method of encoding an audio signal by representing at least part of said audio signal by a plurality of sinusoids, the method comprising the steps of performing an analysis on a first segment of said audio signal, selecting candidate sinusoids based on said analysis, determining for at least one of the candidate sinusoids a phase consistency defined by an extent to which a phase of said

25   candidate sinusoid at a certain moment in time can be predicted from a phase of said candidate sinusoid determined at another moment in time, and selecting said candidate sinusoid as a selected sinusoid when its phase consistency is above a predetermined threshold. The selection of sinusoids according to the invention will result in a smaller number of sinusoids to be encoded for a given audio quality, which is advantageous in terms

30   of bit-rate for a given audio quality.

CLAIMS:

1.   A method of encoding an audio signal by representing at least part of said audio signal by a plurality of sinusoids, the method comprising the steps of:
-        performing an analysis on a first segment of said audio signal;
-        selecting candidate sinusoids based on said analysis;

5   -   determining for at least one of the candidate sinusoids a phase consistency defined by an extent to which a phase of said candidate sinusoid at a certain moment in time can be predicted from a phase of said candidate sinusoid determined at another moment in time; and
-        selecting said candidate sinusoid as a selected sinusoid when its phase

10   consistency is above a predetermined threshold.

2.   A method as claimed in claim 1, wherein the determination of said candidate sinusoid's phase consistency comprises the steps of:
-        segmenting a second segment of said audio signal into at least a first and a

15   second part;
-        determining the actual phases of said candidate sinusoid in at least the first and the second part;
-        using the actual phase in the first part to serve as the input for predicting the actual phase in the second part; and

20   -   determining said candidate sinusoid's phase consistency based on a prediction error between the actual phase and the predicted phase in the second part.

3.   A method as claimed in claim 1, wherein the method further comprises a further selection out of the selected sinusoids which comprises the steps of:

25   -   defining for at least one of the selected sinusoids a local frequency band around said selected sinusoid's frequency;
-        combining amplitudes of frequency components within said local frequency band from which at least one of the selected sinusoids within said local frequency band is excluded; and

-          further selecting said selected sinusoid as a further selected sinusoid in dependence on the combination of amplitudes.

4.   A method as claimed in claim 3, wherein a bandwidth of said local frequency band around said selected sinusoid's frequency is defined in dependence on said selected sinusoid's frequency.

5.   A method as claimed in claim 4, wherein said dependence on said selected sinusoid's frequency is based on a human's perception of audio.

6.   A method as claimed in claim 3, wherein said selected sinusoid is further selected as a further selected sinusoid when its amplitude is significant with regard to said combination of amplitudes, which significance is evaluated by thresholding a difference between said selected sinusoid's amplitude and a weighted mean amplitude of frequency components within said selected sinusoid's local frequency band from which at least one of the selected sinusoids within said local frequency band is excluded.

7.   A method as claimed in claim 3, wherein said selected sinusoid is further selected as a further selected sinusoid when its amplitude is significant with regard to said combination of amplitudes, which significance is evaluated by thresholding a ratio of:
-          a difference between said selected sinusoid's amplitude and a weighted mean amplitude of frequency components within said selected sinusoid's local frequency band from which at least one of the selected sinusoids within said local frequency band is excluded; and
-          a weighted deviation of the amplitudes of frequency components within said local frequency band from which at least one of the selected sinusoids within said local frequency band is excluded.

8.   An audio encoder for encoding an audio signal by representing at least part of said audio signal by a plurality of sinusoids, the audio encoder comprising:
-          means for performing an analysis on a first segment of said audio signal;
-          means for selecting candidate sinusoids based on said analysis;
-          means for determining for at least one of the candidate sinusoids a phase consistency defined by an extent to which a phase of said candidate sinusoid at a certain

moment in time can be predicted from a phase of said candidate sinusoid determined at another moment in time; and

      -        means for selecting said candidate sinusoid as a selected sinusoid when its phase consistency is above a predetermined threshold.

5

9.   An audio encoder as claimed in claim 8, wherein the audio encoder is further conceived to perform a further selection out of the selected sinusoids for which further selection the audio encoder further comprises:

      -        means for defining for at least one of the selected sinusoids a local frequency

10   band around said selected sinusoid's frequency;

      -        means for combining amplitudes of frequency components within said local frequency band from which at least one of the selected sinusoids within said local frequency band is excluded; and

      -        means for further selecting said selected sinusoid as a further selected sinusoid

15   in dependence on the combination of amplitudes.

10.   Audio system comprising means for obtaining an audio signal, an audio encoder as claimed in claim 8 or 9 for encoding said audio signal to obtain an encoded audio signal, and a formatting unit for formatting the encoded audio signal into a format suitable for
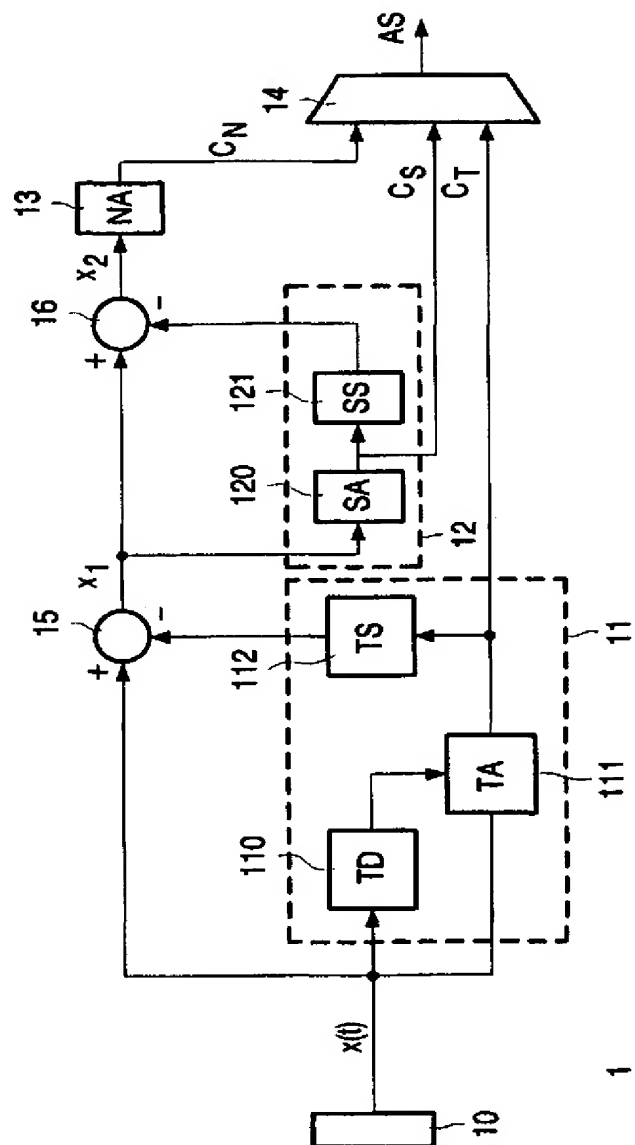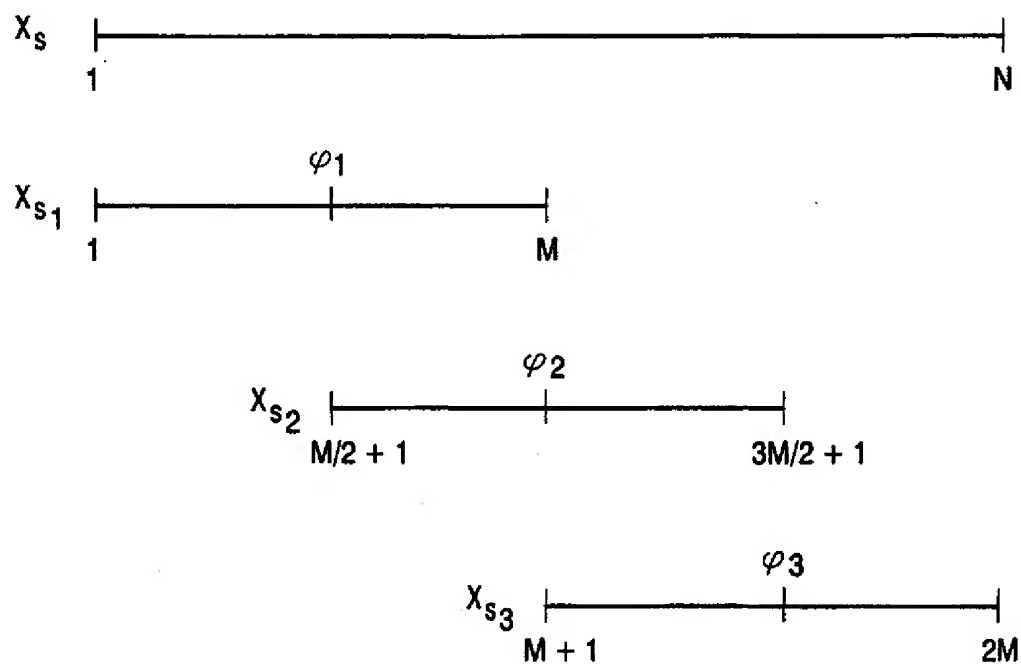
20   storage and/or transmission.

FIG. 1

X_S |————————————————————————————|
1   N

X_{S_1} |————————|————————|
1   φ_1 M

X_{S_2} |————————|————————|
M/2 + 1 φ_2 3M/2 + 1

X_{S_3} |————————|————————|
M + 1 φ_3 2M

FIG. 2

[41] → x(t) → [1] → AS → [42] → → [43]

FIG. 4
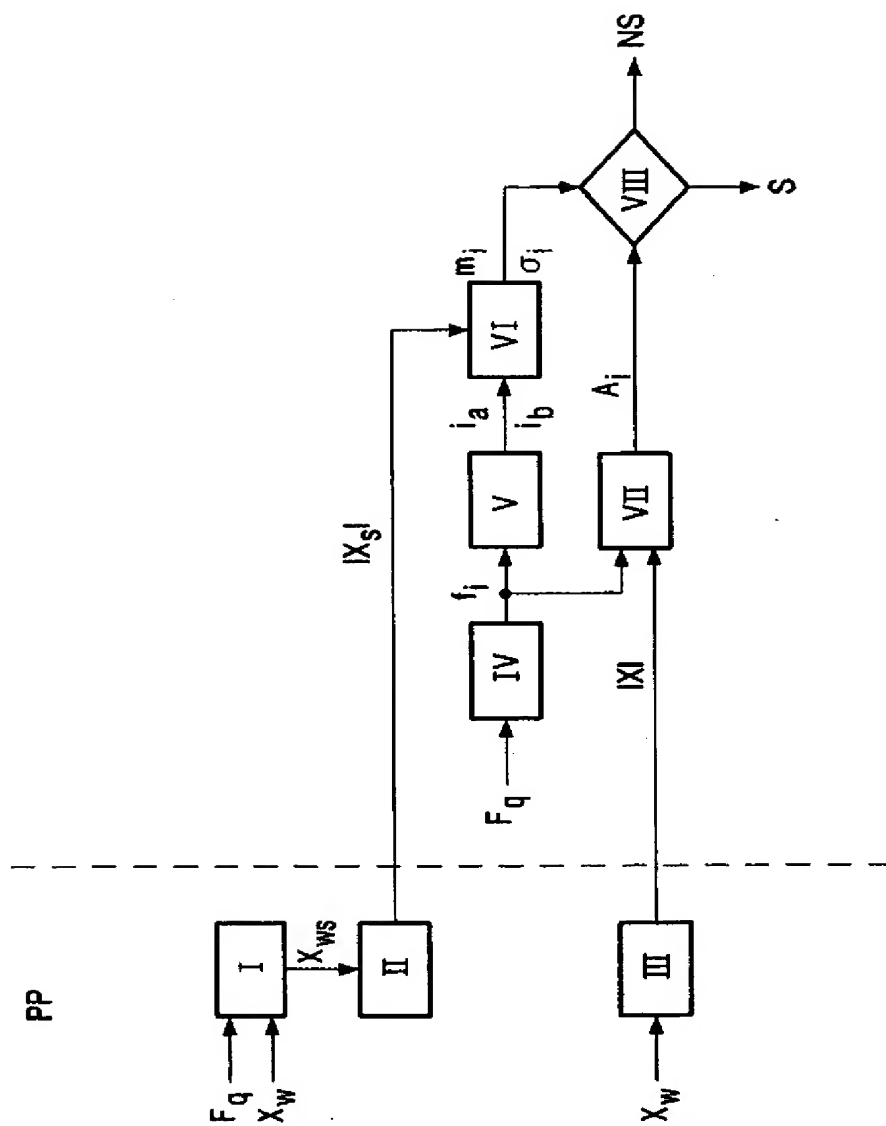
FIG. 3

INTERNATIONAL SEARCH REPORT

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7   G10L19/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7   G10L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC, IBM-TDB

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	LAGRANGE M ET AL: "Sinusoidal parameter extraction and component selection in a non-stationary model" 5TH INTERNATIONAL CONFERENCE ON DIGITAL AUDIO EFFECTS. DAFX-02 PROCEEDINGS, 26 - 28 September 2002, pages 59-64, XP002271607 2002, Hamburg, Germany, Univ. Federal Armed Forces, Germany ISBN: 3-00-010151-9 abstract page 59, left-hand column, paragraph 2 -right-hand column, last paragraph page 61, right-hand column, last paragraph -page 62, left-hand column, last paragraph page 63, left-hand column, paragraph 1	1,8,10
Y	---/--	2,3,6,9

[X] Further documents are listed in the continuation of box C.

[X] Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
26 February 2004	18/03/2004

Name and mailing address of the ISA	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL – 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Santos Luque, R

Form PCT/ISA/210 (second sheet) (July 1992)

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication,where appropriate, of the relevant passages	Relevant to claim No.
A	TAORI R ET AL: "Closed-loop tracking of sinusoids for speech and audio coding" SPEECH CODING PROCEEDINGS, 1999 IEEE WORKSHOP ON PORVOO, FINLAND, PISCATAWAY, NJ, USA,IEEE, US, 20 - 23 June 1999, pages 1-3, XP010345530 ISBN: 0-7803-5651-9 the whole document	1,2,8
Y	US 2002/007268 A1 (OOMEN ET AL) 17 January 2002 (2002-01-17) abstract page 1, paragraph 7 page 2, paragraphs 16,17	2
A	US 2002/133358 A1 (DEN BRINKER ET AL) 19 September 2002 (2002-09-19) abstract page 1, paragraph 12 -page 2, paragraph 16 page 2, paragraph 35 -page 3, paragraph 41 figure 3	1,8,10
Y	PURNHAGEN H ET AL: "Sinusoidal coding using loudness-based component selection" 2002 IEEE INTERNATIONAL CONFERENCE ON ACOUSTICS, SPEECH, AND SIGNAL PROCESSING. PROCEEDINGS (CAT. NO.02CH37334), (CASSP'02), ORLANDO, FL, USA, 13-17 MAY 2002, 13 - 17 May 2002, pages II-1817-20 vol.2, XP002271608 2002, Piscataway, NJ, USA, IEEE, USA ISBN: 0-7803-7402-9 abstract page 1818, left-hand column, paragraph 1 -right-hand column, last paragraph	3,6,9
A	MCAULAY R J ET AL: "SPEECH ANALYSIS/SYNTHESIS BASED ON A SINUSOIDAL REPRESENTATION" IEEE TRANSACTIONS ON ACOUSTICS, SPEECH AND SIGNAL PROCESSING, IEEE INC. NEW YORK, US, vol. ASSP-34, no. 4, August 1986 (1986-08), pages 744-754, XP001002928 ISSN: 0096-3518 cited in the application abstract	1-10

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 2002007268	A1	17-01-2002	CN	1383546 T	04-12-2002
			WO	0199097 A1	27-12-2001
			EP	1203369 A1	08-05-2002
			JP	2003536112 T	02-12-2003
US 2002133358	A1	19-09-2002	CN	1418362 T	14-05-2003
			EP	1356456 A1	29-10-2003
			WO	02056298 A1	18-07-2002